

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (1/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. TELNP0163US

First Inventor or Application Identifier Daniel E. Lewis

Title WIRELESS COMMUNICATION DEVICES ...

Express Mail Label No. EL110376598US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 20]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6]
4. Oath or Declaration [Total Pages 26]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b, is
considered to be part of the disclosure of the accompanying
application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
 - * Small Entity
14. ☐ Statement(s) ☐ Statement filed in prior application,
(PTO/SB/09-12) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Express Mail Certificate
Under 37 CFR 1.10
* A new statement is required to be entitled to pay small entity fees, except
where one has been filed in a prior application and is being relied upon.

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application Information: Examiner _____

Group / Art Unit: _____


18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Mark D. Saralino, Esq.				
	Renner, Otto, Boisselle & Sklar, P.L.L.				
Address	1621 Euclid Avenue				
	Nineteenth Floor				
City	Cleveland	State	Ohio	Zip Code	44115
Country	USA	Telephone	216/621-1113	Fax	216/621-6165

Name (Print/Type)	Mark D. Saralino	Registration No. (Attorney/Agent)	34,243
Signature		Date	12/16/98

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL

Patent fees are subject to annual revision on October 1.
 These are the fees effective November 10, 1998.
 Small Entity payments must be supported by a small entity statement,
 otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
 See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$) 800.00

Complete if Known

Application Number -
 Filing Date Herewith
 First Named Inventor Daniel E. Lewis
 Examiner Name -
 Group / Art Unit -
 Attorney Docket No. TELNP0163US

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit
 Account
 Number
 Deposit
 Account
 Name

18-0988

Renner, Otto, Boisselle

☒ Charge Any Additional
 Fee Required Under
 37 C.F.R. §§ 1.16 and 1.17

☐ Charge the Issue Fee Set in
 37 C.F.R. § 1.18 at the Mailing
 of the Notice of Allowance

2. ☒ Payment Enclosed:

☒ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 760	201 380	Utility filing fee	760
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 760	208 380	Reissue filing fee	
114 150	214 75	Provisional filing fee	
SUBTOTAL (1)			760

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
16	20** = 0	18	0
Independent Claims	2 - 3** = 0	78	0
Multiple Dependent		260	0

**or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
103 18	203 9	Claims in excess of 20	
102 78	202 39	Independent claims in excess of 3	
104 260	204 130	Multiple dependent claim, if not paid	
109 78	209 39	** Reissue independent claims over original patent	
110 18	210 9	** Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)			0

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	40
146 760	246 380	Filing a submission after final rejection (37 CFR 1.129(a))	
149 760	249 380	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify) _____			
Other fee (specify) _____			
SUBTOTAL (3)			40

* Reduced by Basic Filing Fee Paid

SUBMITTED BY

Typed or Printed Name Mark D. Saralino

Signature

Mark D. Saralino

Date 12/16/98

Complete (if applicable)

Reg. Number 34,243

Deposit Account User ID 18-0988

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**TITLE: WIRELESS COMMUNICATION DEVICES CONFIGURABLE VIA
PASSIVE TAGS**

Technical Field

5 The present invention relates generally to wireless communication systems, and more particularly to devices configured to operate within such systems.

Background of the Invention

10 In recent years, the use of wireless communication systems having mobile transceivers which communicate with a hardwired network, such as a local area network (LAN) or a wide area network (WAN), has become widespread. The mobile transceivers, commonly referred to as mobile terminals, may take one of several different forms. For instance, in retail stores hand-held scanning units may be used to allow for scanning inventory bar codes. In a warehouse,
15 portable units mounted to a vehicle may be used to gather information from the warehouse floor. In a medical environment, the mobile terminal may take the form of a pen based workslate which allows medical personnel to work with full page screens at once.

20 In a typical wireless communication system, each mobile terminal communicates with a networked system via a radio or optical link in order to allow for a real time exchange of information. The mobile terminals communicate through one of several access points interconnected to the network. The access points allow for a wireless data communication path to be formed.

25 Information exchanged between mobile terminals and access points is generally sent in packet format. Packets of information (also referred to herein simply as "packets" or "data packets") are a defined set of data bits which carry information such as source address, destination address, synchronization bits, data, error correcting codes, etc. Such packets oftentimes are encrypted, etc.

Mobile terminals and access points typically need to be properly configured prior to their introduction into a wireless network system. For example, mobile terminals and access points typically are manufactured in volume and stored in inventory. When a request for a mobile terminal or access point is received, the requested device is retrieved from inventory and is initially configured via programming for the particular wireless network environment in which it will be used. For example, various information including the device serial number, communication parameters such as the network identification, network address, etc., needs to be programmed initially into the device before it will operate in the particular wireless network system.

Additionally, other types of initial configuration information is oftentimes programmed into the device prior to delivery to the customer. For example, special codes which identify modes of operation, enable/disable various features of the device, etc. are entered into the device. In addition, oftentimes it is desirable to program one or more passwords, encryption keys, etc. into the device in order to restrict access when implemented in the network.

In the past, programming of such initial configuration information into the wireless communication device was carried out by providing a hardwired connection between the device and a programming platform. Typically such hardwired connection was provided via an input/output (I/O) port included in the device. A controller within the programming platform would transmit the configuration information to the device via the I/O port where it would in turn be stored in memory. On the other hand, the initial configuration information can be entered into the device manually via a keypad or touchscreen, for example.

Alternatively, the configuration information could be transmitted to the device via a radio frequency (RF) signal or the like. Since both mobile terminals and access points include RF transceivers typically, a controller could be used to transmit the configuration information to the device via an RF signal so that it may be stored in memory. Such approach, however, requires that the wireless

communication device initially power up under a factory default configuration and then download the appropriate network configurations. This can present significant logistical problems and can require that the purchaser also be able to communicate on factory default settings.

5 A disadvantage associated with both the hardwired, manual and wireless approaches to programming the configuration information is that each requires that the device be both operational and in a powered-on state. This can present a problem for a large number of reasons. For example, a mobile terminal or access point may not be fully assembled and operational at a time when it is most convenient/cost effective to perform the initial configuration programming. This necessitates delaying programming until such time as the device is fully assembled and operational.

10 Furthermore, the need for the device to be in a powered-on state creates additional difficulties. For example, if the device is battery powered it necessitates that the battery be charged at the time of initial programming. If the device is powered by a standard 110VAC supply, for example, it necessitates that separate power be connected to the device. In addition, if the device has previously been packaged in a box, for example, the device must be removed from the packaging in order to be powered up and programmed. Thus, any devices which have been packaged and stored in inventory must be removed prior to programming.

15 Such requirements, e.g., fully assembled, operational, powered up, removed from packaging, etc., add significantly to the time and cost associated with initially configuring the mobile terminals and access points. In view of the aforementioned and other shortcomings, there is a strong need in the art for a system in which such wireless communication devices can be initially configured without requiring full assembly and operation. Moreover, there is a strong need for a system which does not require that the devices be powered up or even removed from their packaging. Such a system would significantly reduce the

time and/or cost associated with programming the initial configuration information into the devices.

5

Summary of the Invention

A wireless communication device is provided which includes a passive radio-frequency (RF) tag having a memory for receiving and storing initial configuration information utilized by the device. The passive tag is a circuit which does not require power from its own power supply. Rather, the passive tag relies on energy derived from an RF signal used to write the initial configuration information to the memory within the passive tag.

In such manner, the initial configuration information is written to the wireless communication device without requiring that the device be fully assembled, operational, powered up, removed from packaging, etc. An RF controller is used to transmit initial configuration information to the passive tag using an RF signal. The passive tag derives sufficient energy from the RF signal to store the initial configuration information in memory. The wireless communication device further includes an interface which allows a processor within the device to access the initial configuration information upon such time when the device is removed from its packaging, powered up and operational.

According to one aspect of the invention, a wireless communication device is provided which includes a transceiver for communicating in a wireless network; a processor for controlling operations of the transceiver based on initial configuration information; a passive tag for receiving the initial configuration information from an external source and storing the initial configuration information in a non-volatile memory at a time when the wireless communication device is otherwise in a non-operational mode; and an interface for enabling the

processor to access the initial configuration information stored in the memory when the wireless communication device is in an operational mode.

According to another aspect of the invention, a method is provided for use in relation to a wireless communication device including a transceiver for communicating in a wireless network, a processor for controlling operations of the transceiver based on initial configuration information and a passive tag. The method includes the step of transmitting the initial configuration information from a source external to the wireless communication device so as to be received by the passive tag and stored in a non-volatile memory within the passive tag while the wireless communication device is otherwise in a non-operational mode.

To the accomplishment of the foregoing and related ends, the invention, then, comprises the features hereinafter fully described and particularly pointed out in the claims. The following description and the annexed drawings set forth in detail certain illustrative embodiments of the invention. These embodiments are indicative, however, of but a few of the various ways in which the principles of the invention may be employed. Other objects, advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the drawings.

Brief Description of the Drawings

Fig. 1 is a system diagram illustrating a wireless communication device having a passive tag in accordance with the present invention, together with an RF controller for programming initial configuration information therein;

Fig. 2 is a front view of an exemplary mobile terminal in accordance with the present invention;

Fig. 3 is a side view of the mobile terminal shown in Fig. 2;

Fig. 4 is an electrical block diagram of a mobile terminal in accordance with the present invention;

Fig. 5 is an electrical block diagram of the passive tag included in a mobile terminal in accordance with the exemplary embodiment of the present invention; and

Fig. 6 is an electrical block diagram of an access point in accordance with the present invention.

Description of the Preferred Embodiments

The present invention will now be described with reference to the drawings wherein like reference numerals are used to refer to like elements throughout.

Referring initially to Fig. 1, a system for programming initial configuration information into a wireless communication device is generally designated 10. The system 10 includes a wireless communication device 12 (shown in phantom) such as a mobile terminal. As will be explained in more detail below, the mobile terminal 12 includes a passive tag 14 (also shown in phantom) which serves to receive and store initial configuration information used by the mobile terminal 12 to operate within a conventional wireless network.

The mobile terminal 12 as shown in Fig. 1 is enclosed in packaging 16 for sake of example. Although such packaging 16 is not necessary to the invention, it helps to illustrate the utility of the invention. The packaging 16 may be any type of packaging such as cardboard, etc.; however the packaging 16 must be penetrable by an RF signal as will be appreciated. The mobile terminal 12 within the packaging 16 may be stored on a shelf in a warehouse or the like as will be further appreciated.

The system 10 further includes an RF controller 18 which serves to transmit an RF signal used to program the initial configuration information into the mobile terminal 12 via the passive tag 14. The RF controller 18 includes a radio transmitter which transmits a signal at a frequency at which the passive tag 14 is tuned to receive. As will be described in more detail below in

connection with Figs. 4 and 5, the passive tag 14 derives sufficient power from the RF signal to operate.

The RF controller 18 modulates the transmitted RF signal with the initial configuration information. The RF signal is transmitted through the packaging 16 and is received by the passive tag 14. The passive tag 14 demodulates the RF signal to obtain the initial configuration information and stores the same in a memory included therein. Upon being powered up in a conventional manner, a processor within the mobile terminal 12 accesses the initial configuration information stored in the memory so that the mobile terminal 12 may operate in the wireless network for which it is destined. In this manner, the mobile terminal 12 receives and stores the initial configuration information without requiring being removed from the packaging 16, powered up, etc.

In fact, the mobile terminal 12 need not even be fully assembled at such time as the initial configuration information is provided thereto. The portion of the mobile terminal 12 including the passive tag 14 may later be combined with any remaining portions of the mobile terminal in order to complete assembly. The initial configuration information stored in memory in the passive tag 14 simply resides in memory until the mobile terminal 12 is assembled and powered up.

The initial configuration information which is stored in the passive tag 14 via the RF controller 18 may be of the type described above, e.g., device serial number, network identification, passwords, encryption keys, etc. The initial configuration data may contain RF configuration data which allows the mobile terminal 12 to associate with a network access point and communicate within the network for which it is destined upon power up.

The initial configuration may also include instructions and a password for locating and communicating with an FTP server to download a software package. The FTP server may be on the network of the customer in which the mobile terminal 12 is to be utilized. Alternatively, the FTP server may be

controlled by the manufacturer. The mobile terminal 12 accesses the manufacturer's FTP server via a gateway on the customer's network and the Internet, for example.

Upon being powered up, the mobile terminal 12 accesses the initial configuration information from the memory in the passive tag 14 and retrieves the instructions for locating the FTP server. The mobile terminal 12 then communicates with the FTP server (e.g., locally or via the Internet). The advantage of such an approach is that the manufacturer does not have to load all of the software the customer purchases with the mobile terminal. Instead, the initial configuration information stored in the passive tag 14 may be used to identify the purchased software and provide a password and instructions for accessing the software from the FTP server.

Fig. 2 illustrates an exemplary mobile terminal 12 including a passive tag 14 in accordance with the present invention. The mobile terminal 12 includes a main housing 20 made of molded plastic or the like. The main housing 20 preferably is sized to fit conveniently in the hand of an operator. Included within the main housing 20 is a display 24. The display 24 may be a conventional liquid crystal display (LCD) such as an active matrix LCD or the like. Alternatively, the display 24 may be an electroluminescent type display, etc.

The mobile terminal 12 further includes a keypad 26 having a plurality of different keys 30 arranged in a predefined configuration. Each key 30 includes thereon a label (not shown) indicative of the particular function of the key. The processor within the mobile terminal 12 (discussed in more detail in connection with Fig. 4) is programmed to interpret a given key 30 in accordance with the particular function identified by the label or otherwise assigned to such key 30. Each key 30 may be depressed by the operator in order to enter information and/or cause the mobile terminal 12 to perform a desired function.

The mobile terminal 12 also includes, for example, a bar code reader 32 which allows the operator to input information from bar code labels.

Furthermore, the mobile terminal 12 includes an antenna 34 which allows the mobile terminal 12 to communicate wirelessly with a base station in a wireless network, for example. As will be discussed more fully with reference to Fig. 4, the mobile terminal 12 in the exemplary embodiment includes a radio transceiver which permits the mobile terminal 12 to communicate wirelessly with other devices such as an access point in a wireless network.

In addition, the mobile terminal 12 includes a communication port 36 exposed through a wall of the main housing 20. The communication port 36 permits the mobile terminal 12 to communicate information and/or download software via a hardwired connection. The port 36 may be any type of standard connector which allows the electronic circuitry within the mobile terminal 12 to communication with another device.

Turning briefly to Fig. 3, a side view of the mobile terminal 12 is shown. As can be seen, the main housing 20 of the mobile terminal 12 is made up of an upper portion 20a and a lower portion 20b, for example. The various components within the main housing 20 are assembled within the respective portions 20a and 20b, and the two portions are then joined together to form an integral housing 20. The portions 20a and 20b may be fixed together via a set of screws, a snap fit, etc.

As represented in phantom in Fig. 3, the mobile terminal 12 includes the passive tag 14 together with the other circuitry within the main housing 20. The passive tag 14 may be mounted on a circuit board with the other circuitry included in the mobile terminal. Alternatively, for example, the passive tag 14 may be mounted on an inside wall of the main housing 20 with cabling or the like providing the appropriate electrical connections to other components within the mobile terminal 12. The particular location of the passive tag 14 is not critical to the invention, although the passive tag 14 preferably is located in an area readily exposed to RF signals transmitted by the RF controller 18 (Fig. 1).

If the main housing 20 is plastic, the RF signals from the RF controller 18 will tend to pass through the housing 20 easily. If the main housing 20 is made of metal or a lossy material which would tend to shield the components within the housing, the passive tag 14 preferably is located at a place within the main housing 20 which includes an aperture to allow the RF signals to reach the passive tag 14.

Fig. 4 illustrates the electronic circuitry included within the main housing 20 of the mobile terminal 12. The mobile terminal 20 is controlled primarily by a processor 40. The processor 40 executes instructions stored in a non-volatile memory 42 for carrying out the various intended operations of the mobile terminal 12. The particular instructions stored in the memory 42 may represent a program which is loaded into the mobile terminal 12 via the communication port 26, for example. In addition, the processor 40 uses the memory 42 to store data or other information which is collected via the mobile terminal 12 (e.g., inventory or patient information, depending on the particular application).

The processor 40 is connected to an ISA bus 44 or other conventional type bus. The display 24 is coupled to the bus 44 via a display driver 46. The processor 40 is programmed to cause the display 24 to represent graphically to the operator appropriate display information during operation via the display driver 46. Such operation is conventional, hence further detail is omitted for sake of brevity.

The mobile terminal 12 includes a radio transceiver 48 which permits the mobile terminal 12 to communicate wirelessly with other devices, such as a base station, using conventional techniques. The transceiver 48 is coupled to the processor 40 via the bus 44 and a PCMCIA controller 50 as shown. In the event the mobile terminal 12 is to transmit information to another device, the processor 40 provides such information to the transceiver 48 via the bus 44 and the controller 50. The transceiver 48 in turn transmits the information as part of an RF signal to the other device using the antenna 34. On the other hand,

information which is transmitted to the mobile terminal 12 from another device is received by the transceiver 48 via the antenna 34. The transceiver 48 in turn provides the information to the processor 40 via the controller 50 and the bus 44.

5 The mobile terminal 12 also includes an input/output (I/O) logic array 52 which provides conventional logic for receiving the respective input signals and output signals from the various I/O devices. Information to/from the communication port 36 and the barcode reader 32 is coupled to the processor 40 via the logic array 52 and the bus 44 using conventional techniques.

10 Moreover, the mobile terminal 12 includes a battery based power supply 54 which provides the appropriate operating power to the various components within the mobile terminal 12.

 The keypad 26 is conventional in design. The keypad 26 includes a keypad matrix 60 together with a column pulse circuit 62 and a row detector circuit 64. Using conventional techniques, the column pulse circuit 62 provides pulses to columns in the matrix 60 and the row detector circuit 64 identifies the row in which a depressed key 30 exists. Both the column pulse circuit 62 and the row detector circuit 64 are coupled to a decoder 66 which determines which key 30 has been depressed based on the outputs thereof. The decoder 66 in turn provides such information to the processor 40 via the I/O logic array 52.

 As shown in Fig. 4, the passive tag 14 includes a coil 70 which functions as an antenna for receiving electromagnetic signals from the RF controller 18. As will be explained in more detail below in relation to Fig. 5, the passive tag 14 includes within a circuit 72 a demodulator and decoder which demodulates and decodes the modulated RF signal received from the RF controller 18. The resultant signal represents initial configuration information which is stored in memory in the circuit 72.

 Data which is stored in memory in the circuit 72 is coupled to the processor 40 via an interface 74 on a command/data bus 76. Address

information is provided by the processor 40 to the memory within the circuit 72 via the interface 74 and an address bus 78. In addition, the processor 40 provides an ACT control signal to the circuit 72 on line 80. The ACT signal is used to switch the memory within the circuit 72 from a passive mode to an active mode when the mobile terminal 12 is powered up. More specifically, the mobile terminal 12 is configured such that when it is powered up (e.g., via the battery power 54) in order to be operational, the ACT signal goes active. This causes power from the battery power 54 to be supplied to the circuit 72 via line 82 as discussed below in relation to Fig. 5.

The interface 74 is provided to perform any voltage conversion, line or data buffering, data conversion which may be necessary depending on the particular type of processor 40 and memory within the circuit 72. The general principles, however, are the same and hence operation of the circuit will be described as if the interface was not present.

Fig. 5 illustrates the exemplary embodiment of the passive tag 14 in more detail. With the exception of some modifications discussed herein, the passive tag 14 is represented in substantial part by the passive tag described in U.S. Patent No. 5,517,194, entitled "Passive RF Transponder and Method", issued May 14, 1996. The entire disclosure of U.S. Patent No. 5,517,194 is incorporated herein by reference.

As shown in Fig. 5, the passive tag 14 includes the aforementioned coil 70 for receiving the RF signals transmitted by the RF controller 18. The received signals are input to a demodulation/decoder/power block 90 included in the circuit 72. As is described in more detail in U.S. Patent No. 5,517,194, the block 90 includes circuitry for demodulating and decoding the received signal in order to obtain data such as the initial configuration information which had been modulated onto the RF signal by the controller 18. The electrical power for carrying out such functions is derived from the energy of the RF signal itself as described in the aforementioned '194 patent.

Address information which determines where the received initial configuration information is stored in memory is output from the block 90 on line 92. The data representing the received initial configuration information itself is output from the block 90 on line 94. Electrical power for operating the passive tag 14 when in the passive mode is derived from the RF signal by the block 90 and is output on line 96.

The passive tag 14 further includes the aforementioned memory 98, an address register 100, and a command/data register 102. While the tag 14 is in the passive mode (i.e., the ACT signal is non-active), address information provided by the block 90 on line 92 is input to the address register 100 which is coupled to the address input of the memory 98. The address in the address register 100 determines the particular location(s) in the memory 98 in which the initial configuration information is stored upon receipt of the RF signal from the RF controller 18. Also while the tag 14 is in the passive mode, the initial configuration information obtained from the received RF signal is provided by the block 90 on line 94 and is input to the command/data register 102. The command/data register 102 is coupled to the data port of the memory 98 so that the data in the register 102 is stored in the memory 98.

In order that the initial configuration information thus stored in the memory 98 may be accessed by the mobile terminal 12 upon being powered up (i.e., in an active mode where the ACT control signal is active), the circuit 72 includes switches 104a, 104b and 104c. Switch 104a serves to switch selectively either the address information from block 90 on line 92 or address information provided by the processor 40 on line 78 to the input of the address register 100. Switch 104b serves to switch selectively either line 94 from block 90 or line 76 from the processor 40 to the command/data register 102. As for switch 104c, this switch controls whether the operating power for the passive tag 14 comes from the RF derived power on line 96 or from line 82.

669737-1 Page 60

In the passive mode, the ACT signal is designed to be non-active and the switches 104a thru 104c are in the positions shown in Fig. 5. The mobile terminal 12 is likely within its packaging, powered down, and/or unassembled, etc., and is in need of receiving initial configuration information. The RF controller 18 (Fig. 1) is configured to operate in a manner similar to that described in the aforementioned U.S. Patent 5,517,194. In particular, the RF controller 18 is configured to transmit the RF signal to the passive tag 14 with the initial configuration information modulated therein. The coil 70 receives the RF signal and derives power for operating the passive tag 14 from the RF signal. Block 90 functions to demodulate and decode the initial configuration information from the RF signal and places information in the form of digital data onto line 94. At the same time, block 90 provides appropriate addressing onto line 92.

The addressing on line 92 is coupled to the address register 100 via the switch 104a. The initial configuration information is coupled into the command/data register 102 via the switch 104b. As a result, the initial configuration information is stored in the nonvolatile memory 98. Power derived from the RF signal on line 96 is provided to the various components within the passive tag 14 via the switch 104c.

When powered up, the processor 40 within the mobile terminal 12 causes the ACT signal to become and remain active. This causes the switch 104a to allow for address information provided on line 78 from the processor 40 to be input to the address register 100. Similarly, the switch 104b allows data accessed from the memory 98 to be provided to the processor 40 via the command/data register 102 and line 76. The switch 104c causes operating power from the supply 54 to be provided to the passive tag 14.

The processor 40 is programmed as part of an initialization routine and/or general operation to access the information in the memory 98 upon being powered up in order to permit the mobile terminal 12 to carry out its intended

functions. For example, upon initially being powered up the processor 40 is programmed to access the location in the memory 98 in which the network address or network identification of the mobile terminal 12 is to have been stored by the RF controller 18. In addition, or in the alternative, the processor 40 may retrieve one or more flags which have previously been stored in the memory 98 by the controller 18 to define prescribed operating parameters. As will be appreciated, there is a wide variety of types of initial configuration information which may be stored and retrieved from the memory 98 in accordance with the present invention.

Fig. 6 illustrates how the inventive features of the mobile terminal 12 in Fig. 4 can be extended to other wireless communication devices such as an access point 150. Operation is substantially similar to that described above in relation to the mobile terminal 12, with the exception that the passive tag 14 is coupled to the processor and power supply of a standard access point circuit 152 rather than a mobile terminal circuit.

The embodiments described above utilize generally a single port memory which selectively receives the signal from the block 90 or the processor 40 via the set of switches 104a thru 104c. In an alternative embodiment, a dual-port memory can be used in place of the memory 98. A first port is coupled to the block 90 for receiving the initial configuration information from the modulated RF signal. A second port is coupled to the processor 40 which enables the processor to access the initial configuration information from the memory when the device is powered up.

Accordingly, the present invention provides a means by which wireless communication devices can be initially configured without requiring full assembly and/or operation. This can significantly reduce the time and/or cost associated with programming the initial configuration information into the devices.

Although the invention has been shown and described with respect to certain preferred embodiments, it is obvious that equivalents and modifications

will occur to others skilled in the art upon the reading and understanding of the specification. The present invention includes all such equivalents and modifications, and is limited only by the scope of the following claims.

Patent 6,636,600

What is claimed is:

1. A wireless communication device, comprising:

a transceiver for communicating in a wireless network;

a processor for controlling operations of the transceiver based on initial
5 configuration information;

a passive tag for receiving the initial configuration information from an
external source and storing the initial configuration information in a non-volatile
memory at a time when the wireless communication device is otherwise in a
non-operational mode; and

10 an interface for enabling the processor to access the initial configuration
information stored in the memory when the wireless communication device is in
an operational mode.

2. The wireless communication device of claim 1, wherein the passive
tag comprises an antenna for receiving a radio frequency (RF) signal with the
15 initial configuration information modulated thereon, and a decoder/demodulator
for demodulating the RF signal and decoding the initial configuration information
therefrom.

3. The wireless communication device of claim 2, wherein the passive
tag derives power from the RF signal and provides the derived power to the
20 decoder/demodulator and the memory.

4. The wireless communication device of claim 1, wherein the initial
configuration information comprises at least one of a network address and a
network identification for the wireless communication device.

5. The wireless communication device of claim 1, wherein the wireless
25 communication device is a mobile terminal.

6. The wireless communication device of claim 1, wherein the wireless
communication device is an access point.

7. The wireless communication device of claim 1, wherein the wireless communication device is non-operational by virtue of the processor being in a powered down state.

8. The wireless communication device of claim 1, wherein the wireless communication device is non-operational by virtue of being unassembled.

9. A method for use in relation to a wireless communication device including a transceiver for communicating in a wireless network, a processor for controlling operations of the transceiver based on initial configuration information and a passive tag, the method comprising the step of:

transmitting the initial configuration information from a source external to the wireless communication device so as to be received by the passive tag and stored in a non-volatile memory within the passive tag while the wireless communication device is otherwise in a non-operational mode.

10. The method of claim 9, wherein the passive tag comprises an antenna for receiving a radio frequency (RF) signal transmitted during the transmitting step with the initial configuration information modulated thereon, and a decoder/demodulator for demodulating the RF signal and decoding the initial configuration information therefrom.

11. The method of claim 10, further comprising the step of the passive tag deriving power from the RF signal and providing the derived power to the decoder/demodulator and the memory.

12. The method of claim 9, wherein the initial configuration information comprises at least one of a network address and a network identification for the wireless communication device.

13. The method of claim 9, wherein the wireless communication device is a mobile terminal.

14. The method of claim 9, wherein the wireless communication device is an access point.

15. The method of claim 9, wherein the wireless communication device is non-operational by virtue of the processor being in a powered down state.

16. The method of claim 9, wherein the wireless communication device is non-operational by virtue of being unassembled.

5

Abstract of the Disclosure

A wireless communication device which includes a passive radio-frequency (RF) tag having a memory for receiving and storing initial configuration information utilized by the device. The initial configuration information is written to the wireless communication device without requiring that the device be fully assembled, operational, powered up, removed from packaging, etc. An RF controller transmits initial configuration information to the passive tag using an RF signal. The passive tag derives sufficient energy from the RF signal to store the initial configuration information in memory. The wireless communication device further includes an interface which allows a processor within the device to access the initial configuration information upon such time when the device is removed from its packaging, powered up and operational.

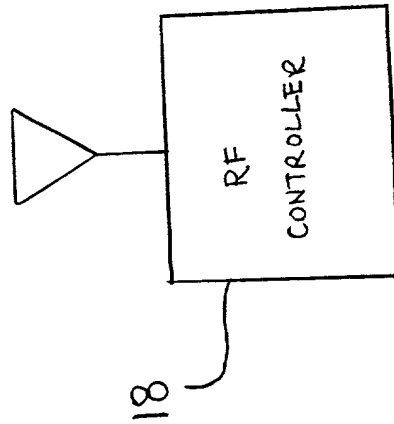
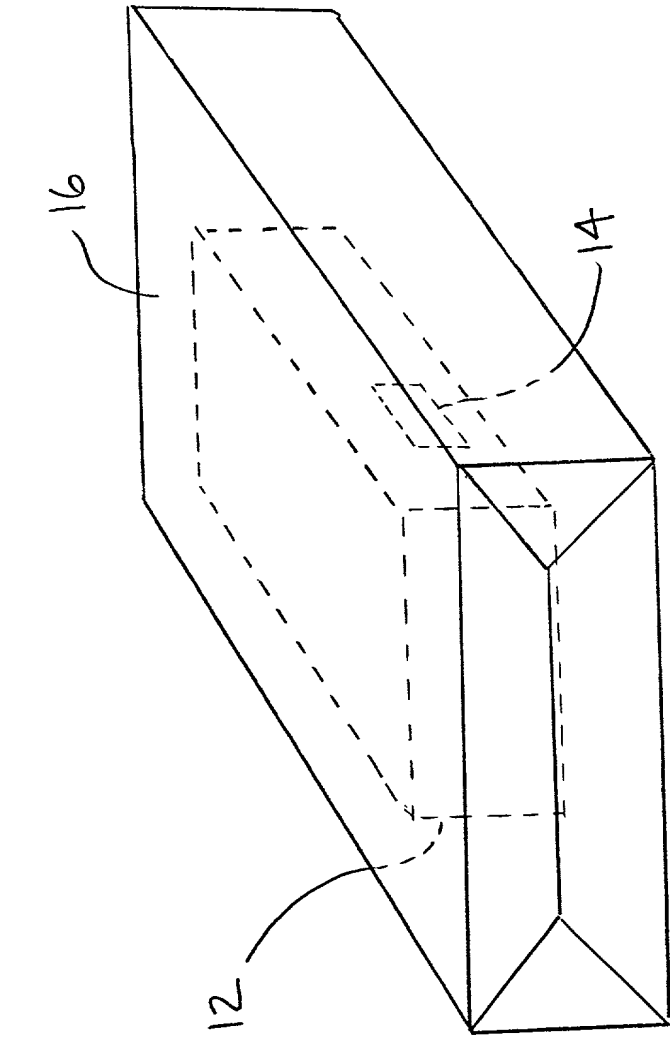


Fig. 1

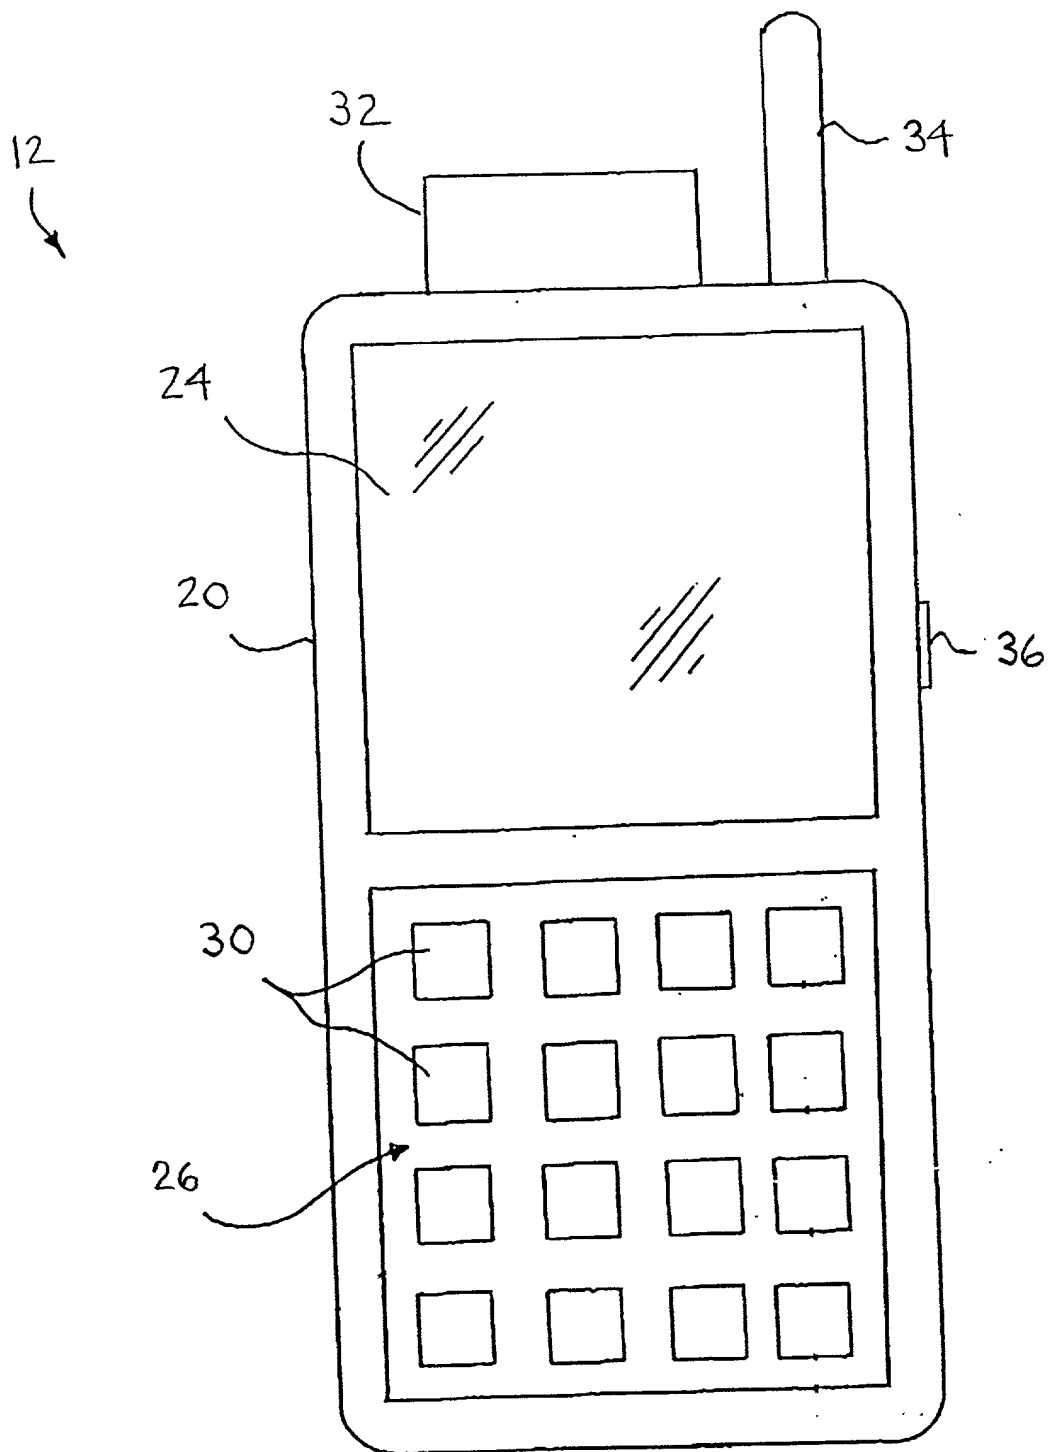


Fig. 2

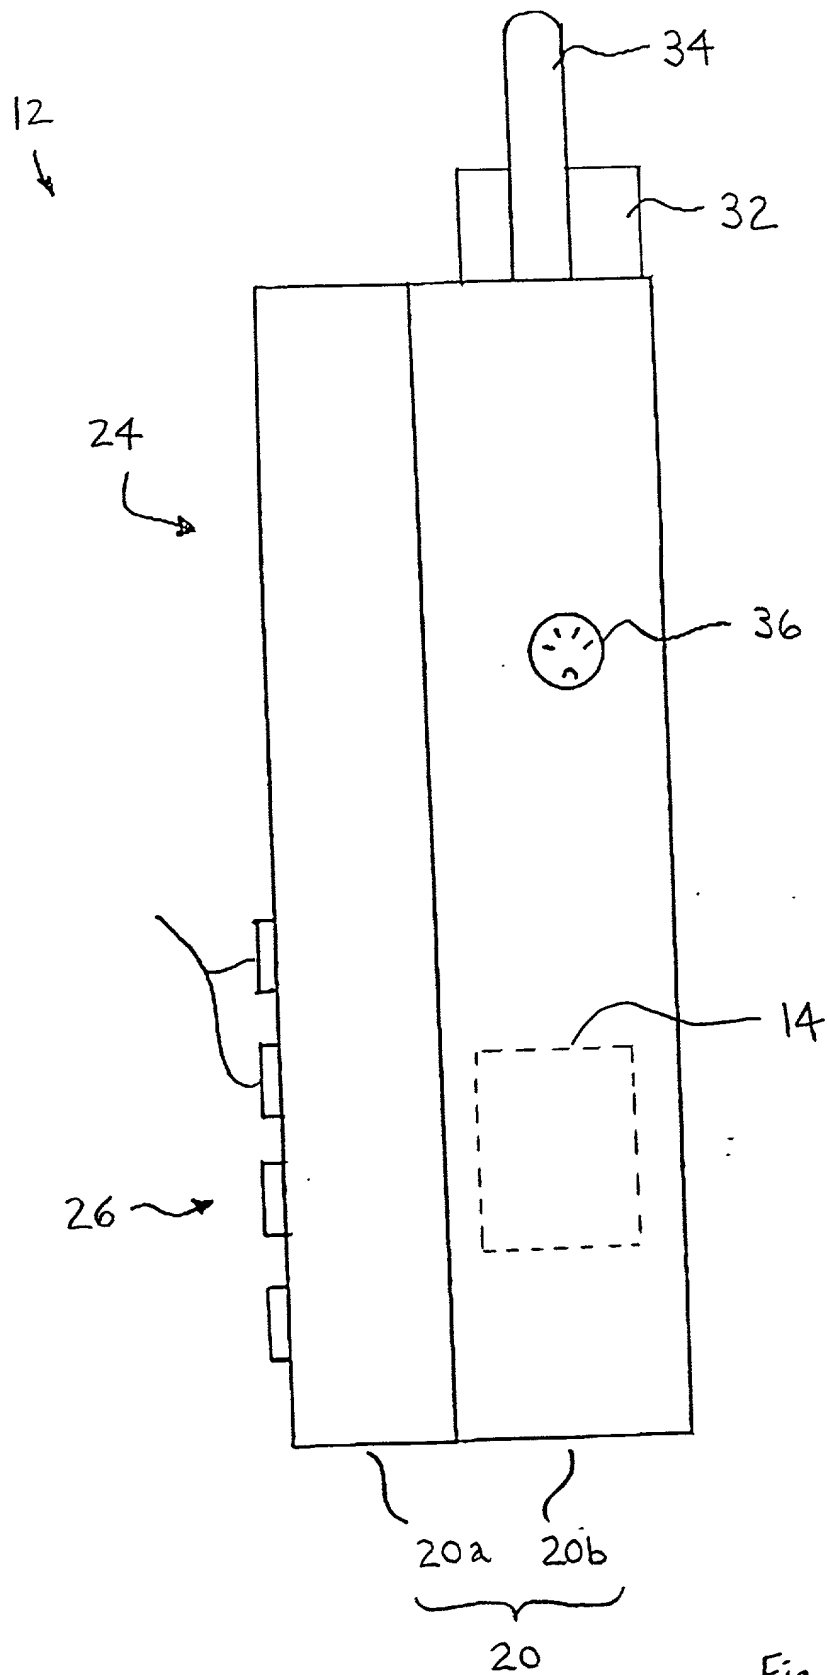


Fig. 3

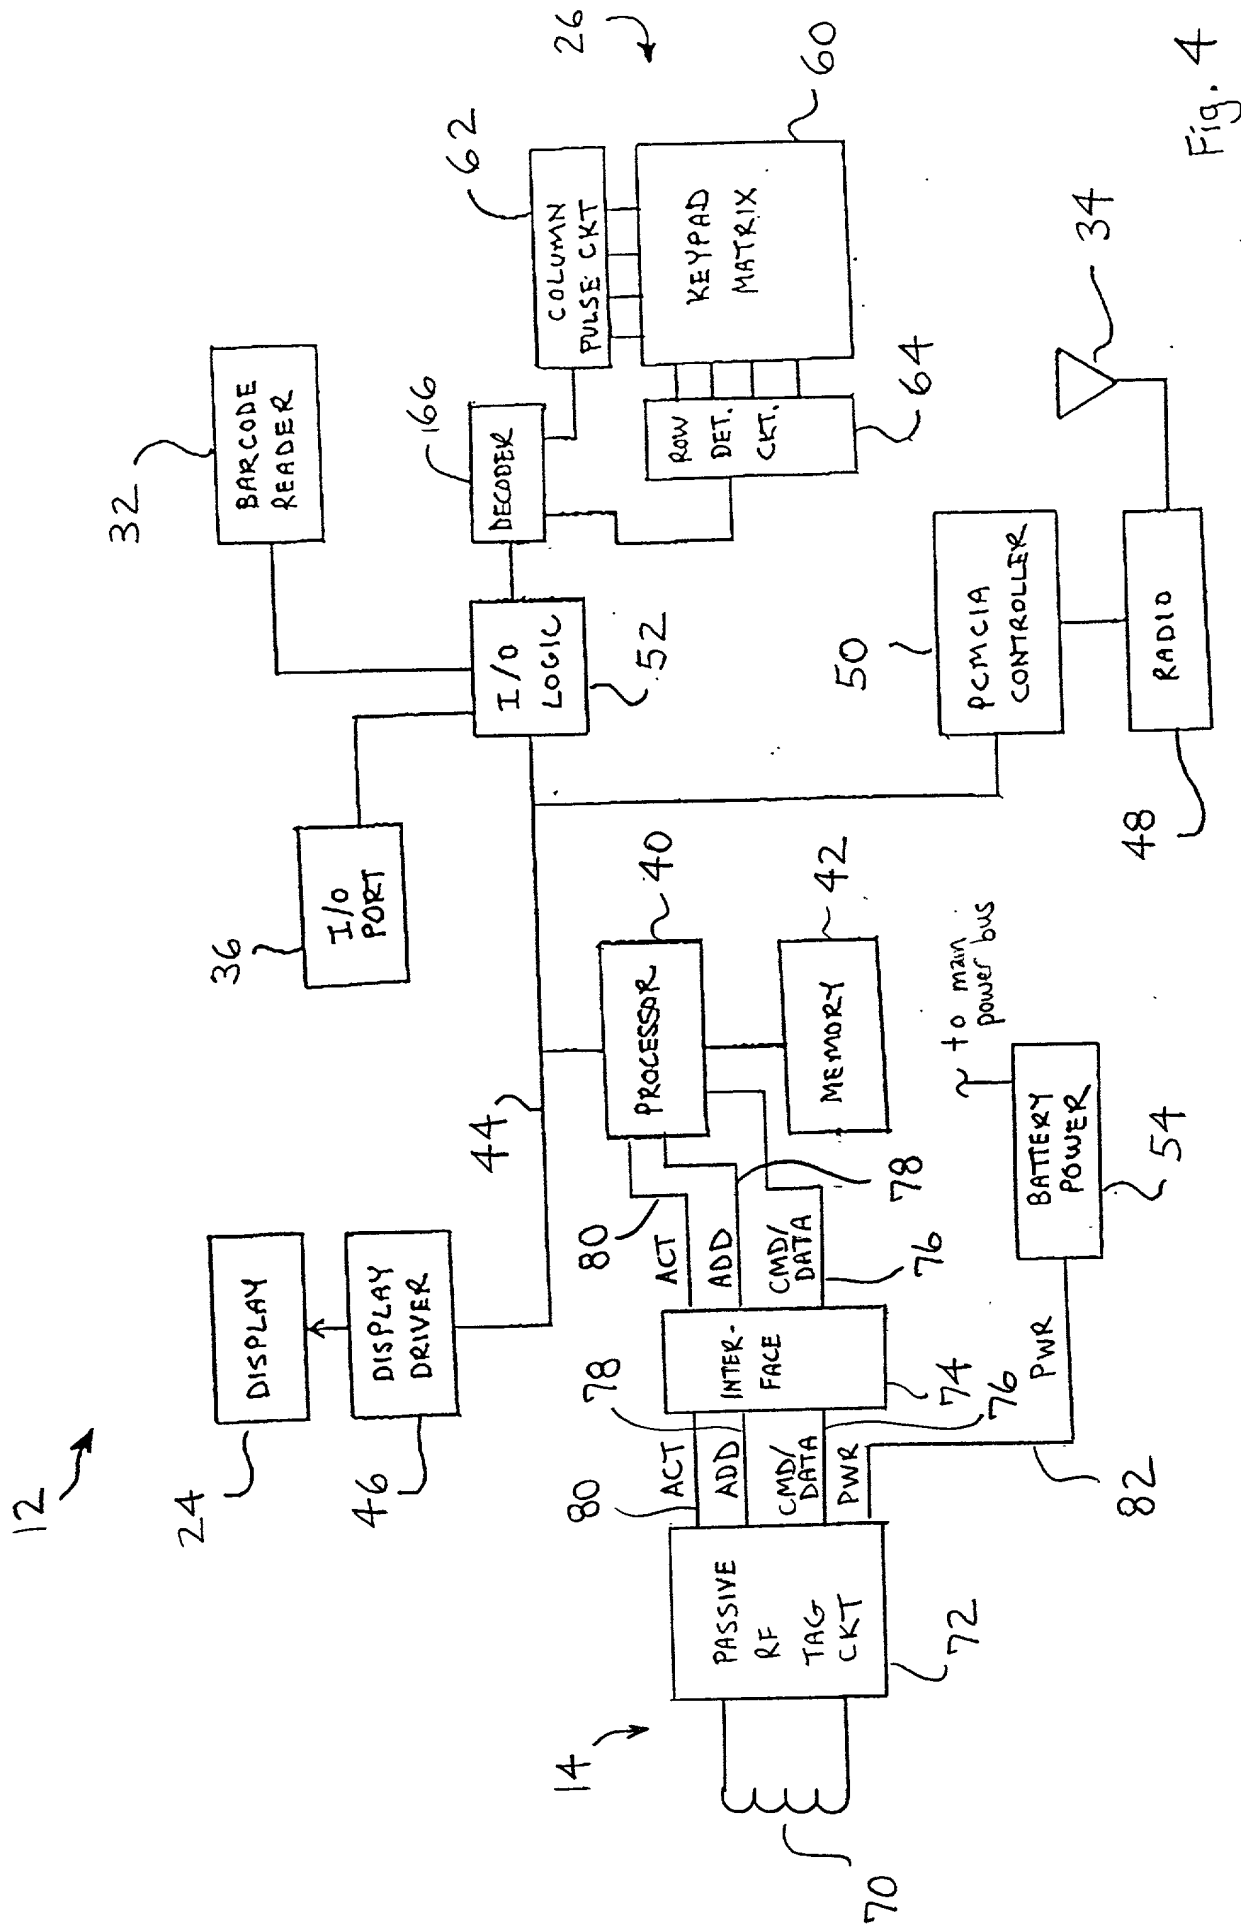


Fig. 4

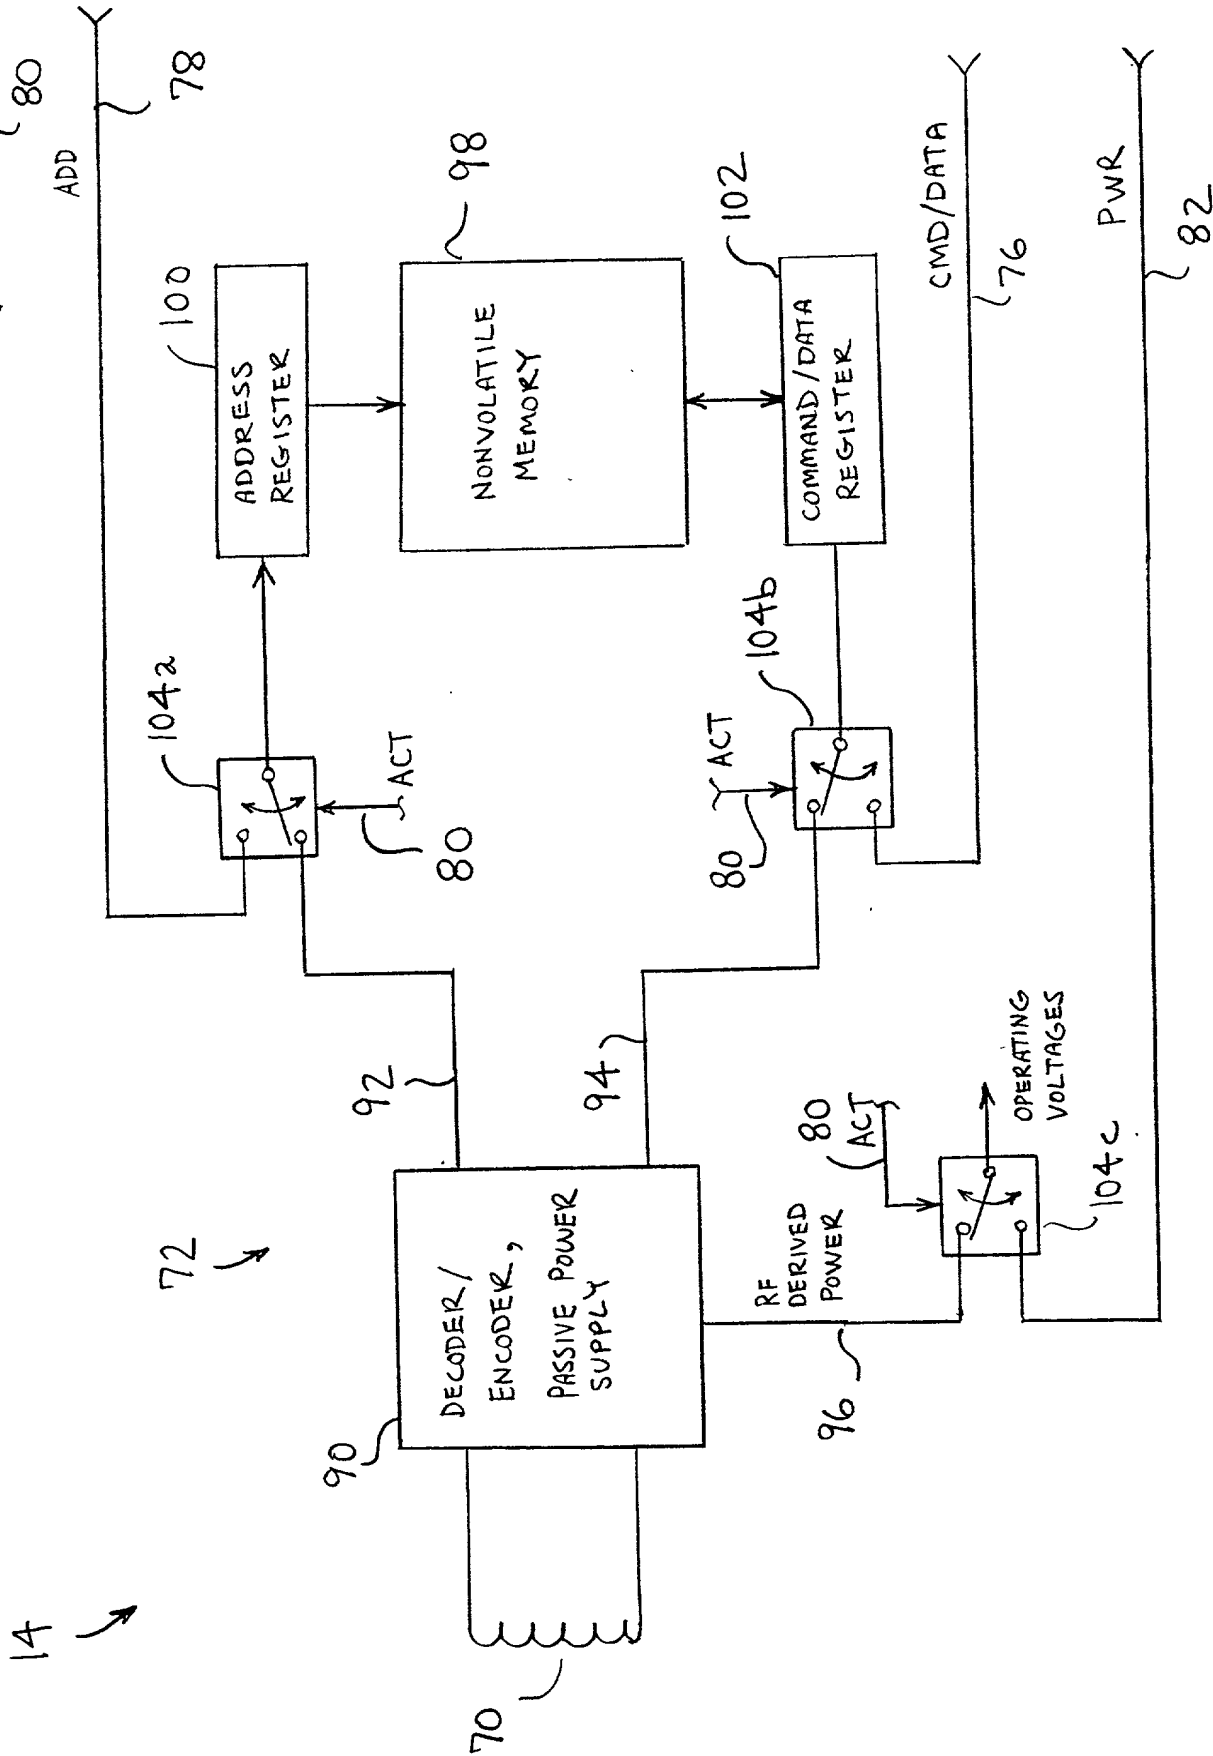


Fig. 5

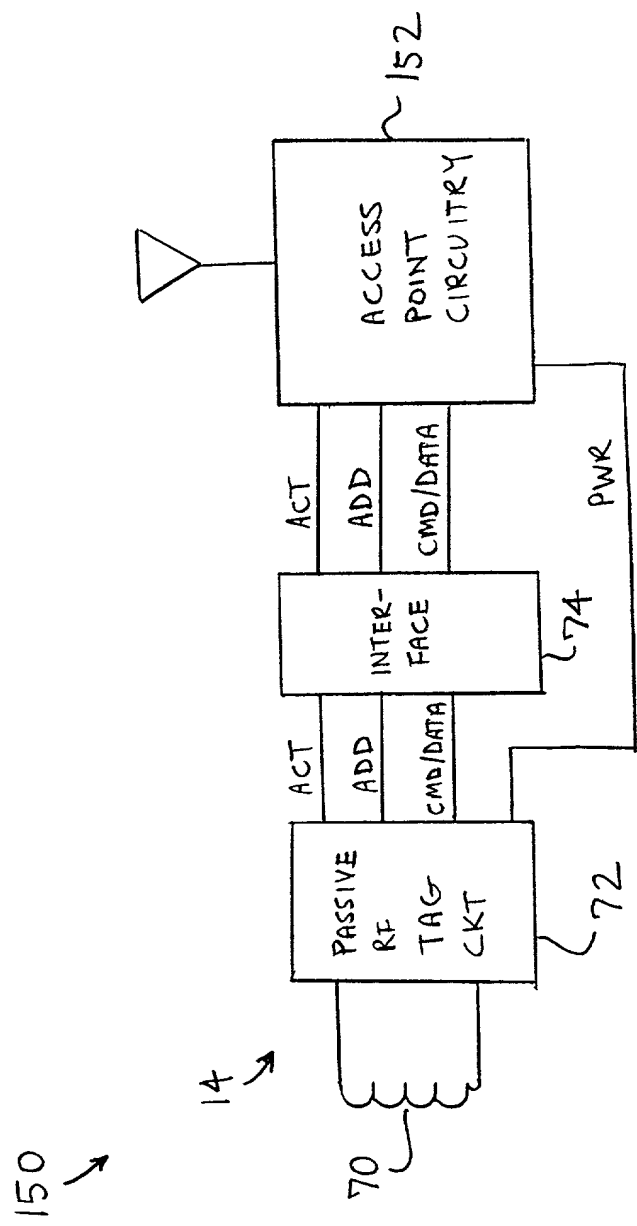


Fig. 6

PATENT (US)

Attorney Docket No. TELNP163US

COMBINED DECLARATION AND POWER OF ATTORNEY
 (ORIGINAL, DESIGN, NATIONAL STAGE OF PCT,
 DIVISIONAL, CONTINUATION OR CIP APPLICATION)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

WIRELESS COMMUNICATION DEVICES CONFIGURABLE VIA PASSIVE TAGS

the specification of which

- (a) X is attached hereto.
- (b) _____ was filed on _____ as _____ Serial No. 0 / _____ or _____ Express Mail No. _____, as Serial No. not yet known, and was amended on _____ (if applicable).
- (c) _____ was described and claimed in PCT International Application No. _____ filed on _____ and amended under PCT Article 19 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S) UNDER 35 U.S.C. 119(e)

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications listed below.

APPLICATION NO.	U.S. FILING DATE (day month, year)	STATUS (Patented, Pending, Abandoned)
_____	_____	_____
_____	_____	_____
_____	_____	_____

CLAIM FOR BENEFIT OF EARLIER U.S./PCT APPLICATION(S) UNDER 35 U.S.C. 120

DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC 120

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

APPLICATION NO.	U.S. FILING DATE (day month, year)	STATUS (Patented, Pending, Abandoned)
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

DECLARATION OF INVENTOR

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Mark D. Saralino, Registration No. 34,243; Himanshu S. Amin, Registration No. 40,894; Nainesh P. Shah, Registration No. 40,166.

Send Correspondence To:


Mark D. Saralino
RENNER, OTTO, BOISSELLE & SKLAR, P.L.L.
1621 Euclid Avenue - 19th Floor
Cleveland, Ohio 44115

Direct Telephone Calls To:
(name and telephone number)

Mark D. Saralino
(216) 621-1113

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued therein.

Full name of sole or first inventor Daniel E. Lewis

Inventor's signature 

Date 12-15-98 Country of Citizenship USA

Residence 39 Pebble Cove Drive, The Woodlands, Texas, 77381

Post Office Address same as residence

Full name of second joint inventor, if any _____

Inventor's signature _____

Date _____ Country of Citizenship _____

Residence _____

Post Office Address _____

CHECK FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH
FORM A PART OF THIS DECLARATION

____ Signature for third and subsequent joint inventors. Number of pages added _____.

____ Added page to combined declaration and power of attorney for signature by one joint inventor on behalf of omitted inventor(s) who refuses to sign or cannot be reached.

X This declaration ends with this page.

C:\G\MDS\Tel\p163us\decl.poa